
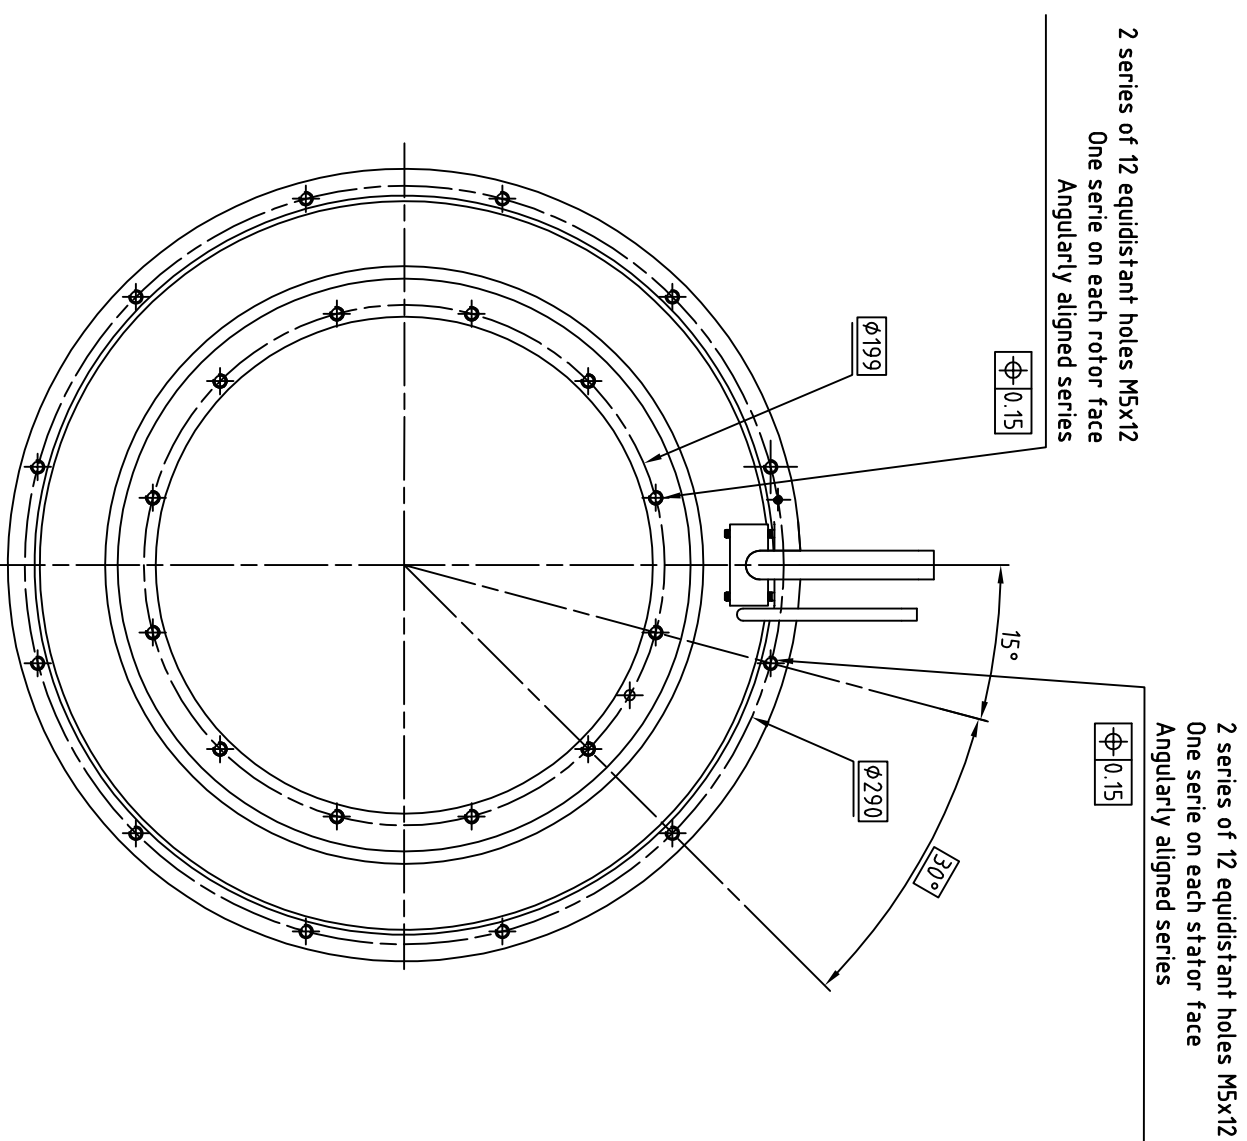


Cable output length 2m:
Power :
 One shielded class 6 cable coded 1,2,3 green/yellow
Thermal sensors :
 One shielded class 6 cable (2x2x0.25mm²)
 Brown-White : PTC
 Green-Yellow : KTY84
 Minimum bending radius (except for the first 50mm) :
 See table

| Cable | Ø | R min. |
|----------|------|--------|
| 2x2x0.25 | 7 | 84 |
| 4x1.5 | 10.2 | 120 |
| 4x2.5 | 11.4 | 135 |
| 4x4 | 13.1 | 155 |
| 4x6 | 15.9 | 190 |
| 4x10 | 18.8 | 225 |

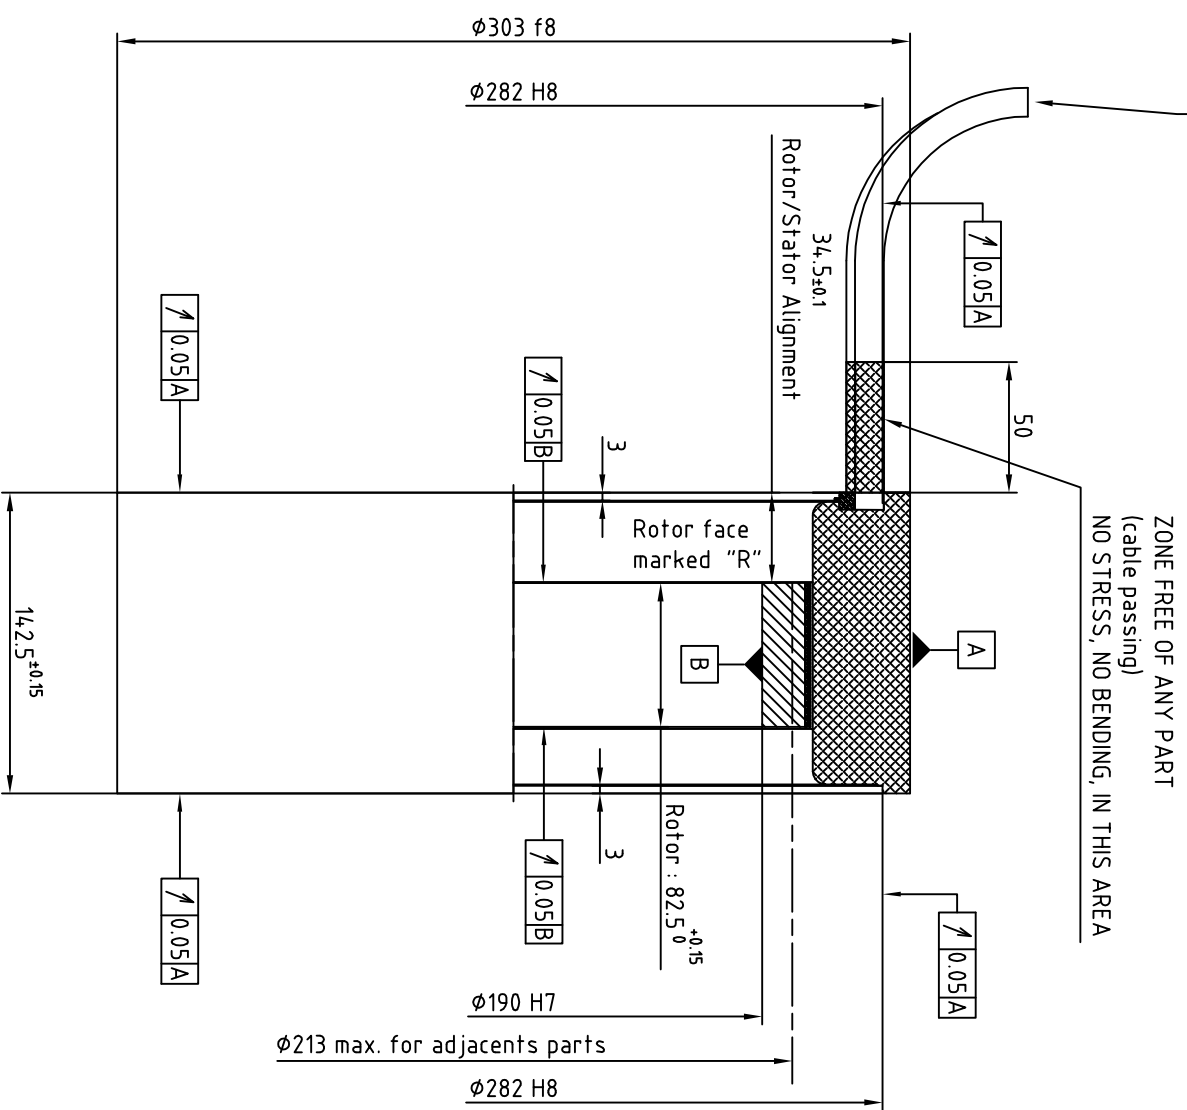

NOTA:
 Rotor is not fitted in the stator
 For more information about mounting see
 document 300STK0-WA002

ALXION

AUTOMATIQUE & PRODUCTIVE
 Parc Technologique des Fossés Jean
 92712 COLOMBEES Cedex
 Tél: 0141306304 - Fax: 0141306136

300STK3M1XXXXXX