



Cable output length 2m:
 Power :
 One shielded class 6 cable coded 1,2,3 green/yellow
 Thermal sensors :
 One shielded class 6 cable (2x2x0.25mm²)
 Brown-White : PTC
 Green-Yellow : KTY84
 Minimum bending radius (except for the first 50mm) :
 See table

Cable	Ø	R min.
2x2x0.25	7	84
4x1.5	10.2	120
4x2.5	11.4	135
4x4	13.1	155
4x6	15.9	190
4x10	18.8	225

ZONE FREE OF ANY PART
 (cable passing)
 NO STRESS, NO BENDING, IN THIS AREA

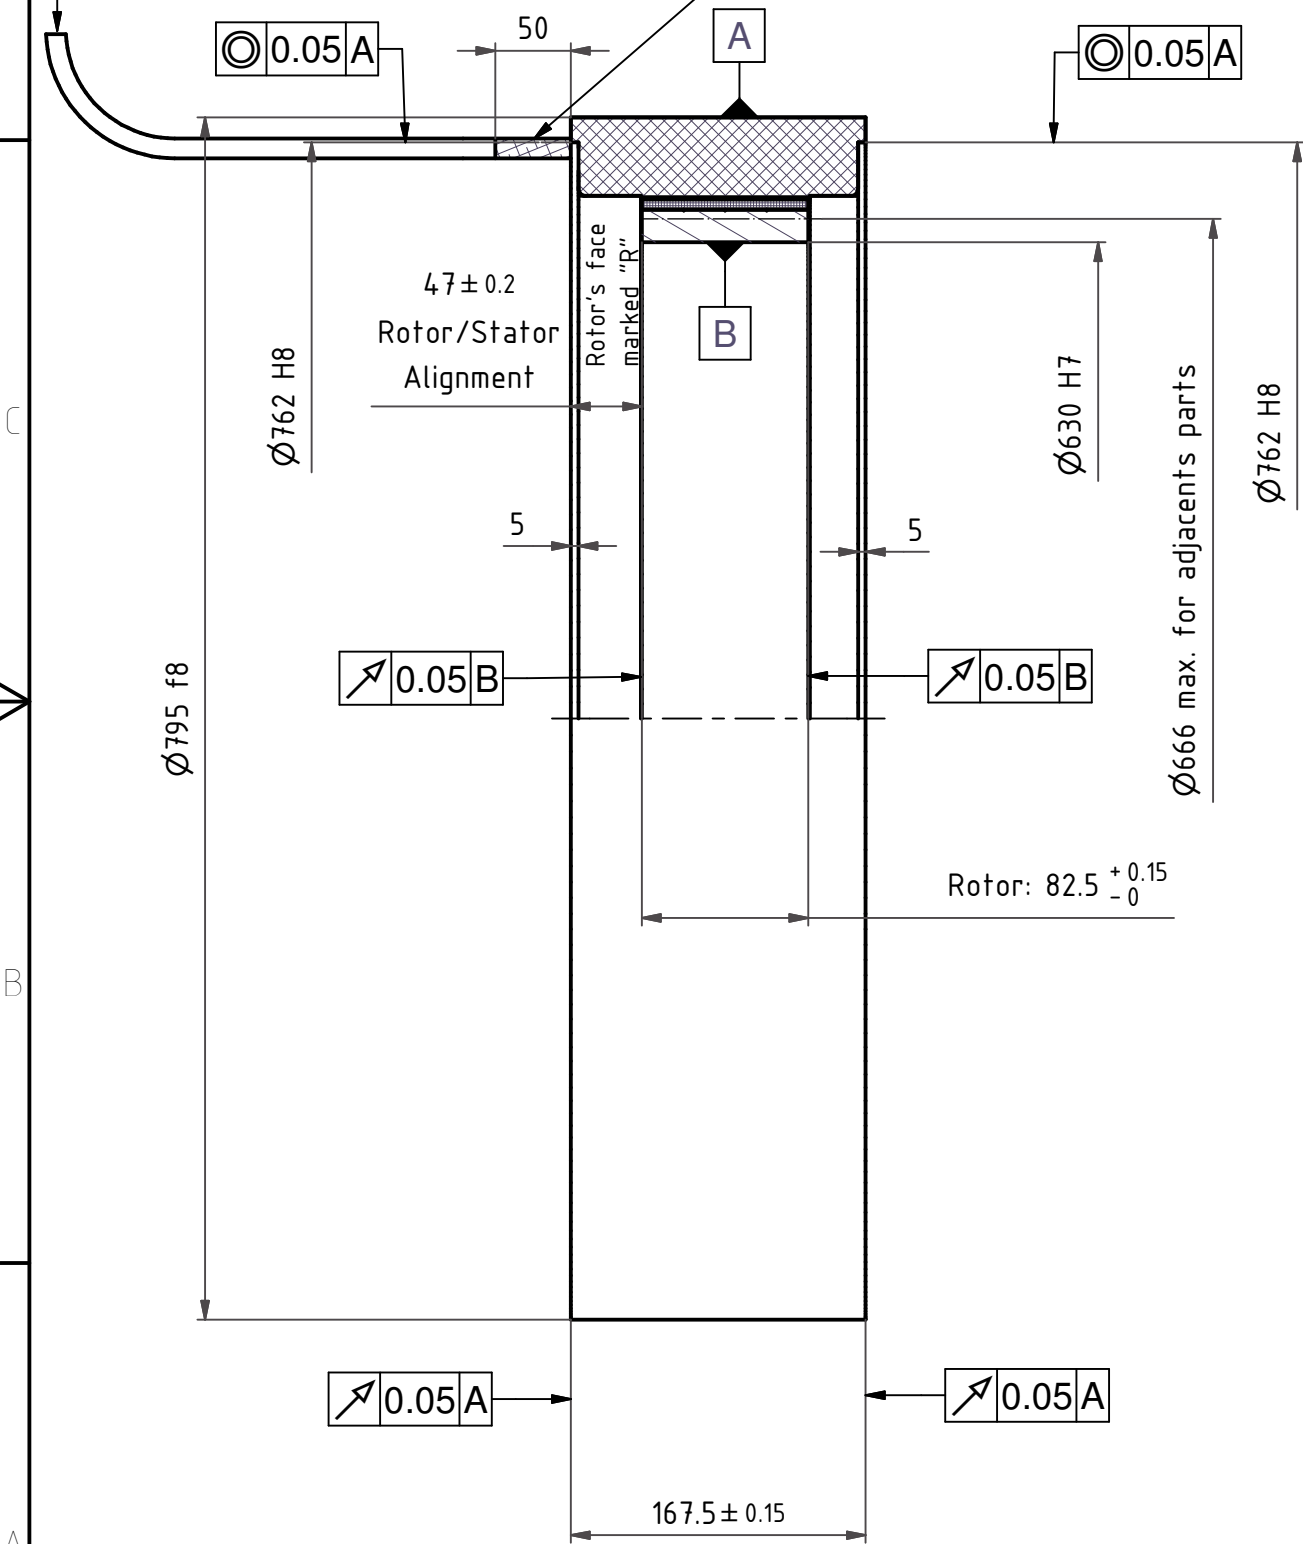

M8x1.25 dept 20
 2 series of 16 equidistant holes
 one serie on each rotor's side
 angularly aligned series

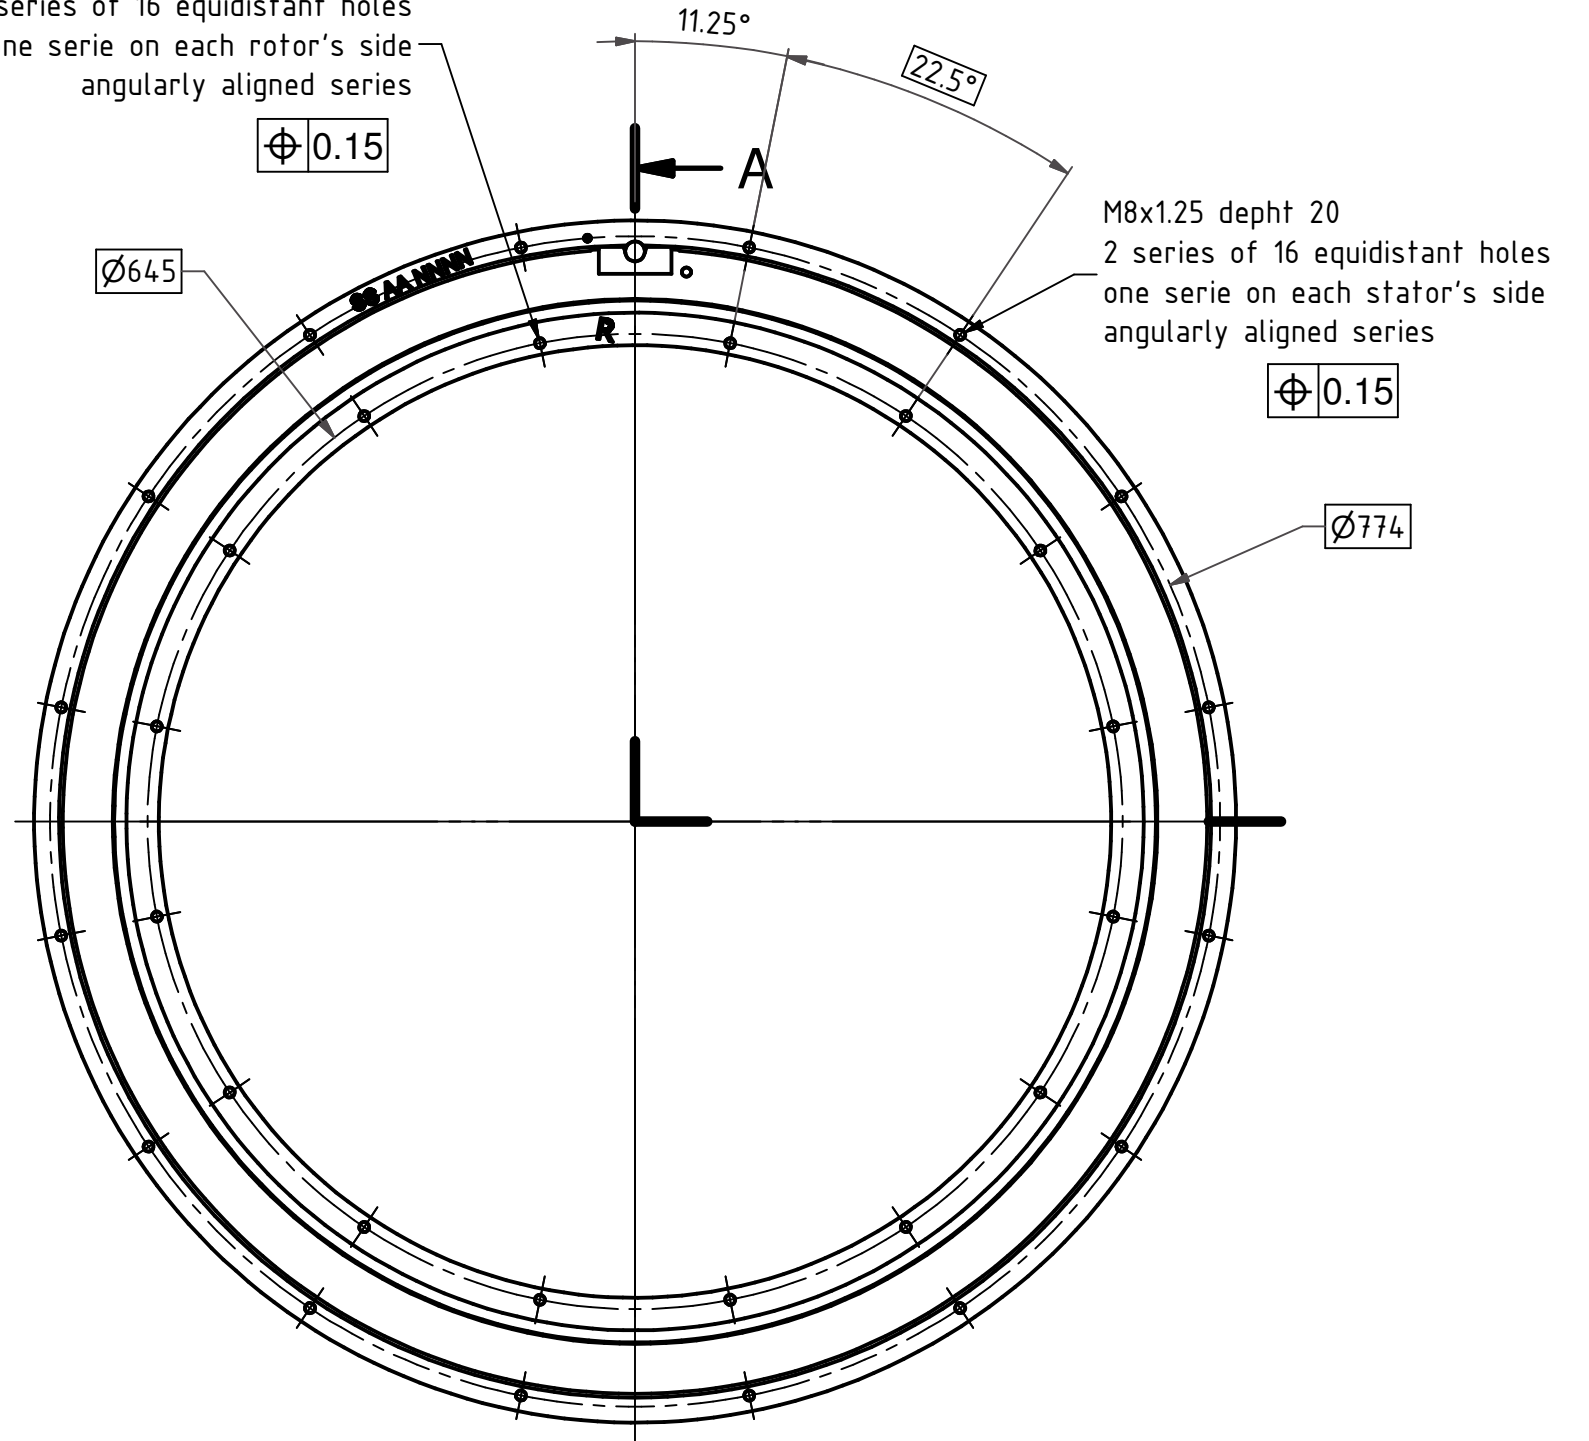

Nota:
 This drawing is valid only for motors with nominal current lower than 72 Amps.
 If the nominal current is greater than 72 Amps, please contact us.

ALXION
 AUTOMATIQUE & PRODUCTIQUE
 Parc Technologique "les Fossés Jean"
 92712 COLOMBES Cedex
 Tél: 0141306304 - Fax: 0141306136
800STK3M1XXXXXX